

## Tutorial 2 - Solutions

### Exercise 1\*

(Assume that  $A, B$  are process constants and  $a, b$  are channel names.)

- $a.b.A + B$     **Correct**
- $(a.Nil + \bar{a}.A) \setminus \{a, b\}$     **Correct**
- $(a.Nil | \bar{a}.A) \setminus \{a, \tau\}$     **False**,  $\tau$  can not be used in a restriction
- $a.B + [a/b]$     **False**, relabelling can be applied only on a valid process expression
- $\tau.\tau.B + Nil$     **Correct**
- $(a.B + b.B)[a/b, b/a]$     **Correct**
- $(a.B + \tau.B)[a/\tau, b/a]$     **False**, the relabeling function should satisfy  $f(\tau) = \tau$
- $(a.b.A + \bar{a}.Nil) | B$     **Correct**
- $(a.b.A + \bar{a}.Nil).B$     **False**, only actions can be used as prefixes
- $(a.b.A + \bar{a}.Nil) + B$     **Correct**
- $(Nil | Nil) + Nil$     **Correct**

### Exercise 2\*

- Derivation of  $(A | \bar{b}.Nil) \setminus \{b\} \xrightarrow{\tau} (a.B | Nil) \setminus \{b\}$ .

$$\begin{array}{c}
 \text{ACT} \quad \frac{}{b.a.B \xrightarrow{b} a.B} \\
 \text{CON} \quad \frac{}{A \xrightarrow{b} a.B} A \stackrel{\text{def}}{=} b.a.B \quad \text{ACT} \quad \frac{}{\bar{b}.Nil \xrightarrow{\bar{b}} Nil} \\
 \text{COM3} \quad \frac{\text{CON} \quad \text{ACT}}{(A | \bar{b}.Nil) \xrightarrow{\tau} (a.B | Nil)} \\
 \text{RES} \quad \frac{\text{COM3}}{(A | \bar{b}.Nil) \setminus \{b\} \xrightarrow{\tau} (a.B | Nil) \setminus \{b\}} \quad \tau, \bar{\tau} \notin \{b\}
 \end{array}$$

- Derivation of  $(A | \bar{b}.a.B) + (\bar{b}.A)[a/b] \xrightarrow{\bar{b}} (A | a.B)$ .

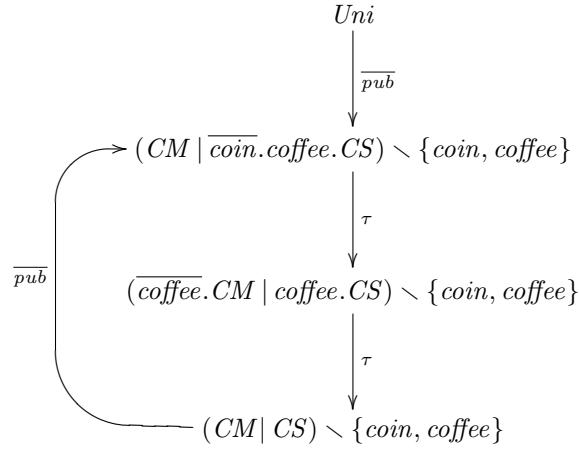
$$\begin{array}{c}
 \text{ACT} \quad \frac{}{\bar{b}.a.B \xrightarrow{\bar{b}} a.B} \\
 \text{COM2} \quad \frac{}{A | \bar{b}.a.B \xrightarrow{\bar{b}} A | a.B} \\
 \text{SUM1} \quad \frac{\text{COM2}}{(A | \bar{b}.a.B) + (\bar{b}.A)[a/b] \xrightarrow{\bar{b}} (A | a.B)}
 \end{array}$$

- Derivation of  $(A | \bar{b}.a.B) + (\bar{b}.A)[a/b] \xrightarrow{\bar{a}} A[a/b]$ .

$$\begin{array}{c}
 \text{ACT} \quad \frac{}{\bar{b}.A \xrightarrow{\bar{b}} A} \\
 \text{REL} \quad \frac{}{(\bar{b}.A)[a/b] \xrightarrow{\bar{a}} A[a/b]} \\
 \text{SUM2} \quad \frac{\text{ACT} \quad \text{REL}}{(A | \bar{b}.a.B) + (\bar{b}.A)[a/b] \xrightarrow{\bar{a}} A[a/b]}
 \end{array}$$

**Exercise 3\***

LTS for the process  $Uni \stackrel{\text{def}}{=} (CM \mid CS) \setminus \{coin, coffee\}$ .

**Exercise 4**

Transition system for  $A \stackrel{\text{def}}{=} (a.A) \setminus \{b\}$ .

$$A \xrightarrow{a} A \setminus \{b\} \xrightarrow{a} (A \setminus \{b\}) \setminus \{b\} \xrightarrow{a} ((A \setminus \{b\}) \setminus \{b\}) \setminus \{b\} \xrightarrow{a} \dots$$

One solution could be the CCS defining equation  $B \stackrel{\text{def}}{=} a.B$  which generates a finite LTS with (intuitively) the same behavior as  $A$ .